1.6X0.8mm SMD CHIP LED LAMP

Part Number: APT1608MGC Mega Green


Features

- 1.6mmX0.8mm SMT LED, 0.75mm thickness.
- Low power consumption.
- Wide viewing angle.
- Ideal for backlight and indicator.
- Various colors and lens types available.
- Package: 2000pcs / reel .
- Moisture sensitivity level : level 3.
- RoHS compliant.

Description

The Mega Green source color devices are made with AlGaInP on GaAs substrate Light Emitting Diode.

Package Dimensions

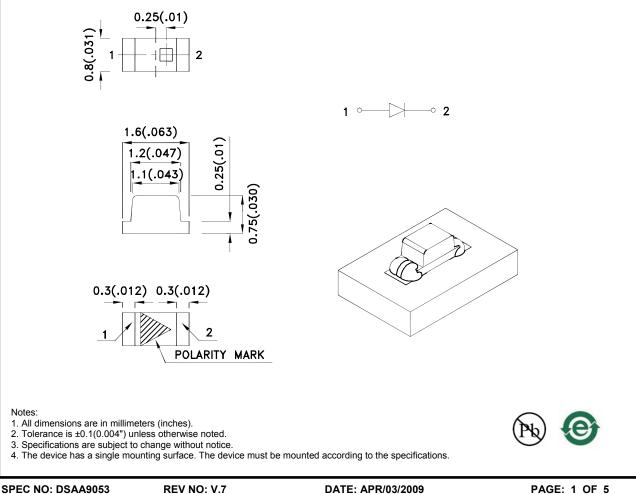

APPROVED: WYNEC

REV NO: V.7 CHECKED: Allen Liu DATE: APR/03/2009 DRAWN: S.M.Wu PAGE: 1 OF 5 ERP: 1203001676

Soloction Guida

Selection Guide					
Part No.	Dice	Lens Type Iv (mcd) [2] @ 20mA		/	Viewing Angle [1]
			Min.	Тур.	201/2
APT1608MGC	Mega Green (AlGaInP)	WATER CLEAR	18	70	120°

Notes:

1. θ /2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value. 2. Luminous intensity/ luminous Flux: +/-15%.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Mega Green	574		nm	IF=20mA
λD [1]	Dominant Wavelength	Mega Green	570		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Mega Green	26		nm	IF=20mA
С	Capacitance	Mega Green	20		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Mega Green	2.1	2.5	V	I⊧=20mA
lr	Reverse Current	Mega Green		10	uA	Vr=5V

Notes:


1.Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V.

Absolute Maximum Ratings at TA=25°C

Parameter	Mega Green	Units		
Power dissipation	75	mW		
DC Forward Current	30	mA		
Peak Forward Current [1]	150	mA		
Reverse Voltage	5	V		
Operating Temperature	-40°C To +85°C			
Storage Temperature	-40°C To +85°C			

Note:


1. 1/10 Duty Cycle, 0.1ms Pulse Width.

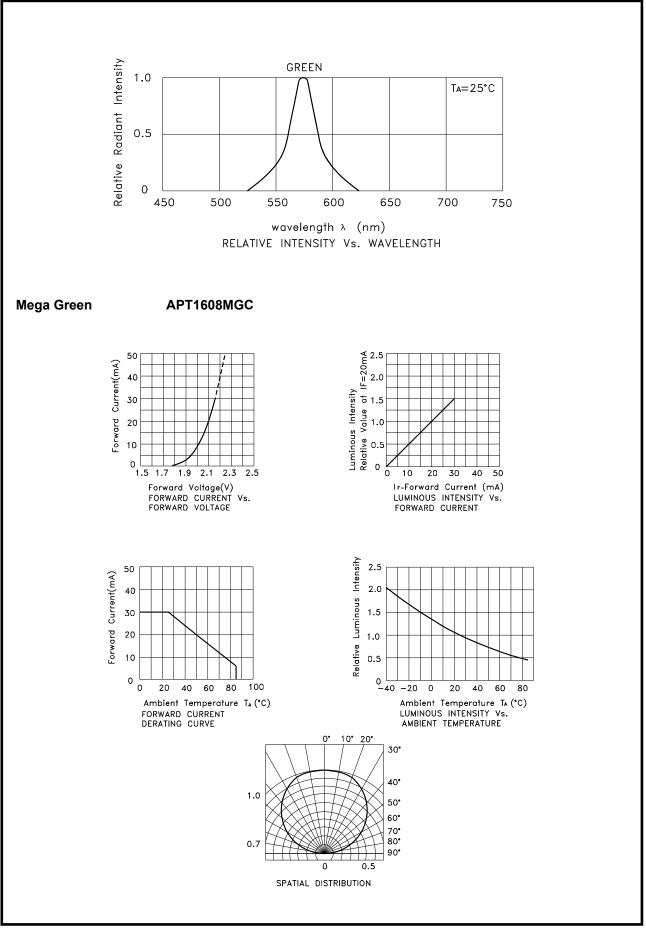

APT1608MGC

Reflow soldering is recommended and the soldering profile is shown below. Other soldering methods are not recommended as they might cause damage to the product.

Reflow Soldering Profile For Lead-free SMT Process.

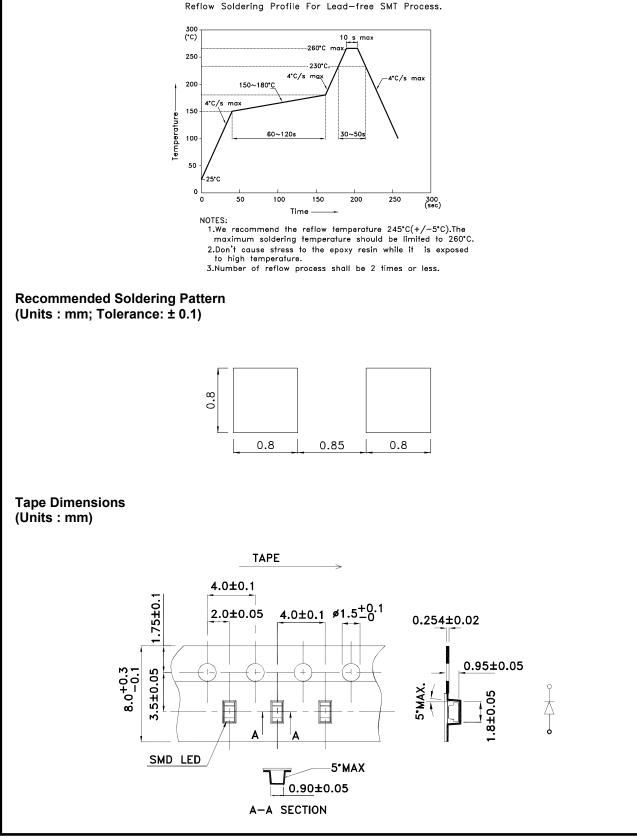

DATE: APR/03/2009 DRAWN: S.M.Wu

