

35-01/G4C-ARTB

Features

- . High Flux Output.
- . Designed for High Current Operation.
- . Low Profile.
- . Packaged in Tubes for Use with Automatic Insertion Equipment.
- .The product itself will remain within RoHS compliant version.
- . ESD-withstand voltage: up to 4KV



Descriptions

This revolutionary package design allows the light designer to reduce the number of LEDs required and provide a more uniform and unique illuminated appearance than with other LED solutions. This is possible through the efficient optical package design and high-current capabilities.

The low profile package can be easily coupled with reflectors or lenses to efficiently distribute light and provide the desired light appearance.

Applications

- . Automotive Lighting
- . Electronic Signs and Signals
- . Channel Letter
- . Special Lighting application

Device Selection Guide

PART NO.	C		
	Material	Emitted Color	Lens Color
35-01/G4C-ARTB	InGaN	Brilliant Green	Water Clear


Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev. 1 Page: 1 of 7

Device number: DLE-305-007 Established date: 04-30-2007 Established by: Jim Lin



35-01/G4C-ARTB

Package Dimensions

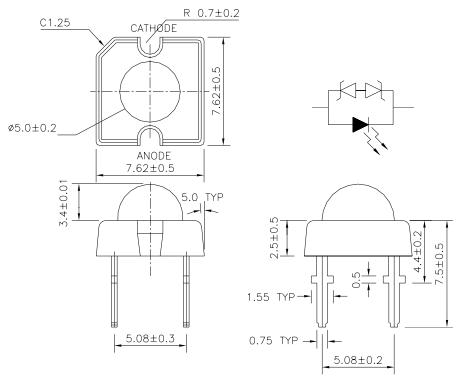

Notes: 1.All dimensions are in millimeters

- 2.An epoxy meniscus may extend about 1.5mm(0.059") down the leads
- 3.Tolerances unless dimensions ±0.25mm

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Units
Continuous Forward Current	I_{F}	30	mA
Peak Forward Current(Duty 1/10 @ 1KHZ)	I_{FP}	100	mA
Reverse Voltage	V_{R}	5	V
Operating Temperature	T_{opr}	-40 ~ +85	$^{\circ}$ C
Storage Temperature	T_{stg}	-40 ~ +100	$^{\circ}$ C
Soldering Temperature(T=5 sec)	T_{sol}	260 ± 5	$^{\circ}$ C
LED Junction Temperature	T_{j}	125	$^{\circ}$ C
Power Dissipation	P_d	100	mW
Zener Reverse Current	Iz	100	mA
Electrostatic Discharge	ESD	4000	V

Everlight Electronics Co., Ltd. Device number: DLE-305-007

http:\\www.everlight.com

Established date: 04-30-2007

Rev. 1

Page: 2 of 7

Established by: Jim Lin



35-01/G4C-ARTB

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Condition	Unit
Total Flux	Фv	4500	6000	9000	I _F =30mA	mlm
Viewing Angle	2 0 1/2		25		I _F =30mA	deg
Peak Wavelength	λр		518		I _F =30mA	nm
Dominant Wavelength	λd	520	525	532	I _F =30mA	nm
Spectrum Radiation Bandwidth	Δλ		36		I _F =30mA	nm
Forward Voltage	VF	3.0	3.5	4.0	I _F =30mA	V
Zener Reverse Voltage	Vz	5.2			Iz=5mA	V
Reverse Current	IR			10	V _R =5V	uA

Rank

35-01/G4C-ARTB

(1)		(2
-----	--	----

_	
	(0)
/	(3)
)	(3)

	(1) VF(V))	(2) λ d(nm)		$(3)\Phi v(mlm)$			
Bin	Min	Max	Bin	Min	Max	Bin	Min	Max
1	3.00	3.20	3	520	524	R	4500	5650
2	3.20	3.40	4	524	528	S	5650	7150
3	3.40	3.60	5	528	532	T	7150	9000
4	3.60	3.80						
5	3.80	4.00						

*Measurement Uncertainty of Forward Voltage: ±0.1V

*Measurement Uncertainty of Luminous Intensity: ±15%

*Measurement Uncertainty of Dominant Wavelength ±1.0nm

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev. 1 Page: 3 of 7

Device number: DLE-305-007 Established date: 04-30-2007 Established by: Jim Lin




35-01/G4C-ARTB


Typical Electro-Optical Characteristics Curves

Relative Intensity vs. Wavelength


Forward Current vs. Forward Voltage




Relative Intensity vs. Forward Current



Forward Current vs. Ambient Temp.



Relative Intensity vs. Angle Displacement



Everlight Electronics Co., Ltd. Device number: DLE-305-007

http:\\www.everlight.com

Established date: 04-30-2007

Rev. 1

Page: 4 of 7

Established by: Jim Lin




35-01/G4C-ARTB

Packing Quantity Specification

- (1) 60 pcs/1 tube, 20 tubes/1 small inside box, 12 small inside boxes/1 outside box
- (2) 60 pcs/1 tube, 80 tubes/1 big inside box, 4 big inside boxes/1 outside box

Label Form Specification

(1)Tube Label Form



(2)Box Label Form

EVERLIGHT	
CPN:	
P/N:	
8 81 18 18 18 88 18 88 88 88 88 88 8 8 8 8 8 8 8 8 8 8 8 8	_{RoHS}
35-01/G4C-ARTB	
QTY:	CAT:
	HUE:
LOT NO:	REF:
MADE IN TAIWAN	N

PART NO: Everlgiht's Production Number

QTY: Packing Quantity LOT NO: Lot Number

CAT: Ranks of Forward Voltage, Dominator Wavelength and Total Flux

CPN: Customer's Production Number

P/N: Production Number

HUE: Reference REF: Reference

MADE IN TAIWAN: Production Place

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev. 1 Page: 5 of 7


Device number: DLE-305-007 Established date: 04-30-2007 Established by: Jim Lin



35-01/G4C-ARTB

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 4. Below the zener reference voltage Vz, all the current flows through LED and as the voltage rises to Vz, the zener diode "breakdown." If the voltage tries to rise above Vz current flows through the zener branch to keep the voltage at exactly Vz.
- 5. When the LED is connected using serial circuit, if either piece of LED is no light up but current can't flow through causing others to light down. In new design, the LED is parallel with zener diode. if either piece of LED is no light up but current can flow through causing others to light.

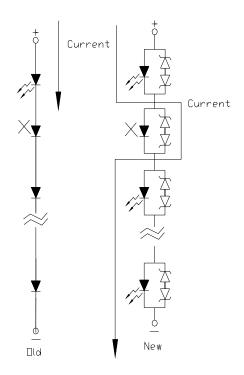

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev. 1 Page: 6 of 7

Device number: DLE-305-007 Established date: 04-30-2007 Established by: Jim Lin



35-01/G4C-ARTB

6. Soldering Condition

Careful attention should be paid during soldering. When soldering, leave more then 3mm from solder joint to case, and soldering beyond the base of the tie bar is recommended.

Avoiding applying any stress to the lead frame while the LEDs are at high temperature particularly when soldering.

Recommended soldering conditions:

Hand	Soldering	DIP Soldering		
Temp. at tip of iron	400°C Max. (30W Max.)	Preheat temp.	100°C Max. (60 sec Max.)	
Soldering time	3 sec Max.	Bath temp.	265 Max.	
Distance	3mm Min.(From solder joint	Bath time.	5 sec Max.	
	to case)			
		Distance	3mm Min.	

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http:\\www.everlight.com

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev. 1 Page: 7 of 7

Device number: DLE-305-007 Established date: 04-30-2007 Established by: Jim Lin